


These instructions provide the basic information to install a metal modesty panel to a pedestal, end panel or support panel.

1 Facing the pedestal, determine where the modesty panel will attach to the pedestal: on the left or right side. Remove the pedestal drawers.

2 Inside each pedestal are two front and two rear uprights (Figure A). In the front flange of the rear upright, look for locator holes where modesty panel will attach. Drill the four holes, left OR right, with an 1/8" bit.


NOTE: If future reconfiguration is expected, a pedestal non-deface kit can be ordered to attach modesty panel to the pedestal without drilling into it. Contact National customer service.

Figure A

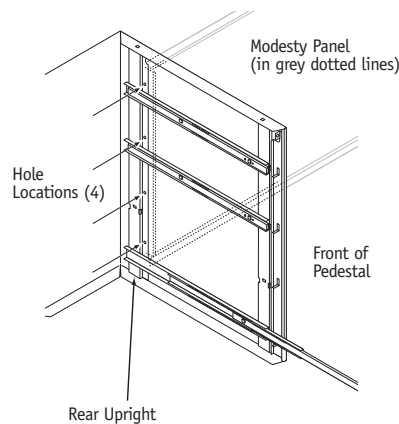


3 With finished side facing out, secure one end of modesty panel to pedestal with four (4) #10x1/2" screws (Figure B).

Figure B

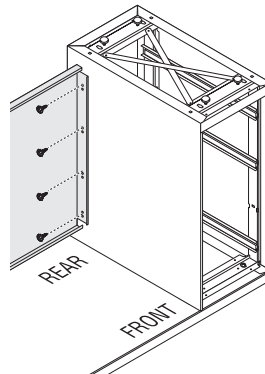

4 Install end panel or support panel to worksurface or second pedestal and secure modesty panel using the screws provided. Return support panel is illustrated in Figure C.

Figure C



5 Retighten all screws, beginning with modesty panel and working your way out to the pedestal and end panels.

Assembly Instructions

WaveWorks®
Metal Modesty Panels

Recommended Tools

- Drill w/#2 & 1/8" Phillips bits
- 5/16" Hex socket
- 3/16" Hex head wrench
- Level

Package Contents

- Modesty Panel
- #10x1/2" Hex head screws

NATIONAL

Furniture with Personality®

Telephone 800.482.1717
Fax 812.482.8800
www.nationalonline.com

Part # 2010782

Printed in U.S.A
© 2006 Kimball International, Inc.

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Service.