


1

Position and level units at desired location. Place (1) clamp on the front side of the ganging joint, between the legs. Place the other clamp on the back side of the ganging joint, between the legs (Figure A). **NOTE:** Clamps should have padded jaws.

Figure A

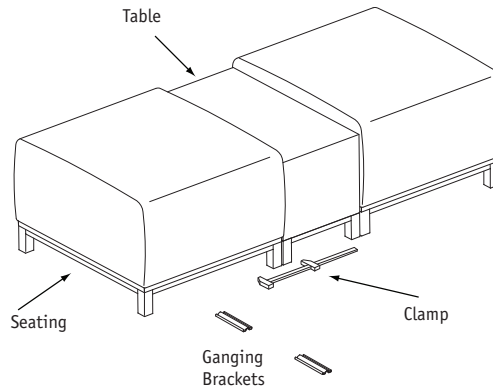


2

Tighten the front side clamp to allow the ganging bracket to squeeze over each rail of the joint (Figure B). Loosen some pressure from the front clamp. Repeat the process on the back side until the ganging brackets are engaged secure on the joint.

NOTE: There are two 6" ganging brackets per joint.

Figure B

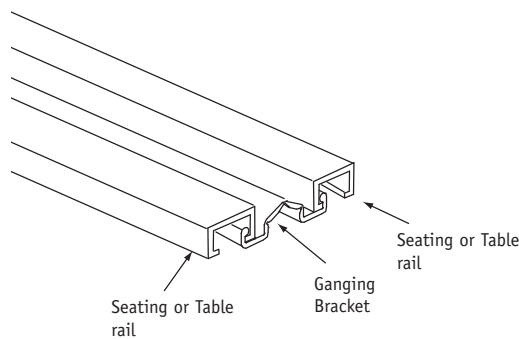

NOTE: To remove the ganging bracket place clamps on the front and back sides of the ganging joint and pull down on the bracket.

Assembly Instructions

Swift™ Seating Ganging Bracket

Recommended Tools

- Clamps
- Level
- Square

Package Contents	Qty.
• Mounting Brackets	Per
Order	

NATIONAL Furniture with Personality™

Telephone 800.482.1717
 Fax 812.482.8800
 www.nationalonline.com

Part #2130497
 Rev ,A

Printed in U.S.A
 © 2008 Kimball International, Inc.

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Service.