

Note: These instructions provide basic information to assemble a WaveWorks metal highback organizer and attach it to a freestanding modular worksurface organizer. A metal highback organizer is assembled using an Overhead unit, Tackboard envelope and 2 End support panels (Figure A).


1

High back organizer must be the same width as the rectangular freestanding unit.

Close and lock receding door in the overhead storage unit to prevent them from sliding open during installation.

Note: Locks are shipped separately, install the lock prior to this installation.

Figure A

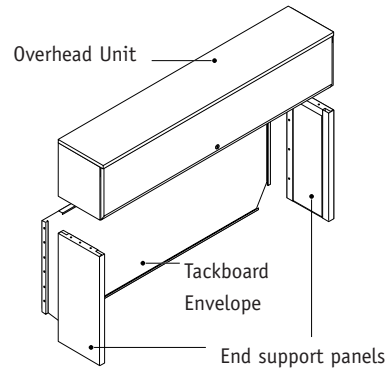


2

Turn overhead storage unit upside down with the door facing you.

Remove inset pieces from end support panels. With the smooth side of the left end support panel facing outward, secure the panel to the underside of the storage unit using three (3) #10 x 1/2" screws in pre-drilled hole locations. Replace for the right end support (Figure B).


Figure B

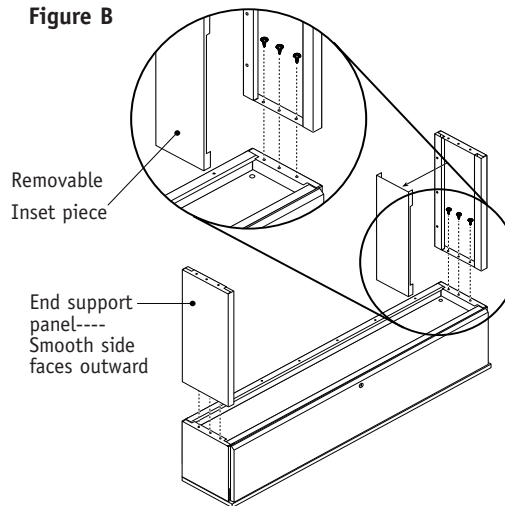

3

With finished, smooth side of the tackboard envelope facing outward, and 45° cutouts facing upward, slide tackboard envelope down and in between the installed end support panel. Secure tackboard envelope to storage unit and end panels using #10 x 1/2" screws (Figure C).

Figure C

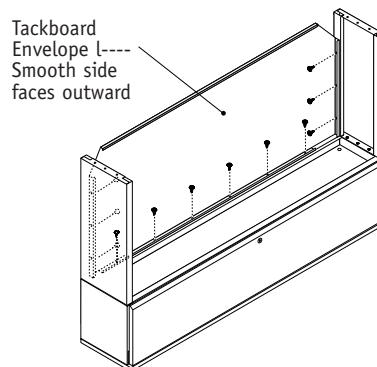

Ensure that the freestanding unit is properly assembled and level.

WaveWorks® Metal Highback Organizer

Recommended Tools

- Drill
- Phillips Head Screwdriver w/#2 Phillips head bit
- Tape Measure
- Level

Package Contents	Qty.
• #8 x 3/4" Round Washer Head Phillips Combination screw	4
• #10 x 1/2" Hex Head Washer screws	18

NATIONAL

Furniture with Personality®

Telephone 800.482.1717
Fax 812.482.8800
www.NationalOfficeFurniture.com

Part #2338472
Rev,A

Printed in U.S.A
© 2012 Kimball International, Inc.

Assembly Instruction

WaveWorks® Metal Highback Organizer

4 Turn the assembled highback organizer right side up. Place on top of the free-standing unit, flush to the rear edge of the unit. The outside edge of each end support panel should be 1/8" inset from the edge of the worksurface of the free-standing unit (Figure D).

5 Secure the highback organizer to the worksurface of the free standing unit using, two (2) #8 x 3/4" screws per end support panel (Figure D).

6 Replace inset pieces on both end support panels. With 45° cutouts pointing downward, slide the top of the tackboard up and into the tackboard envelope (Figure E).

Note: Highback organizer must be properly assembled, installed onto the worksurface, and level before installing the tackboard.

Figure (F) shows fully assembled and installed unit.

Figure D

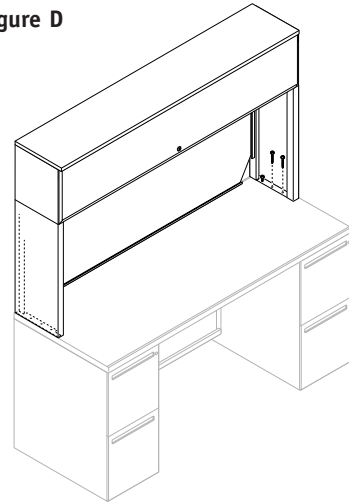


Figure E

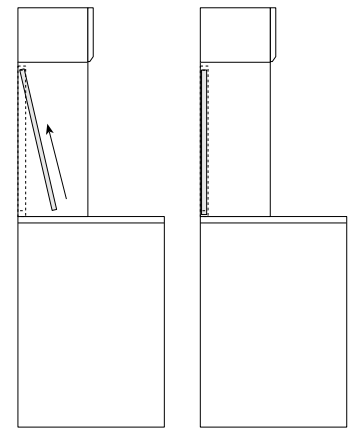


Figure F

