


ASSEMBLY INSTRUCTIONS


Bridge with Hinged Modesty Panel

- 1 Position and level the main unit in the desired location. Install two (2) flat brackets to the main unit using four (4) #10 x 1" Panhead screws per bracket (Figure A).


Note: To level, refer to the Leveling Assembly Instruction sheet, 2076621.

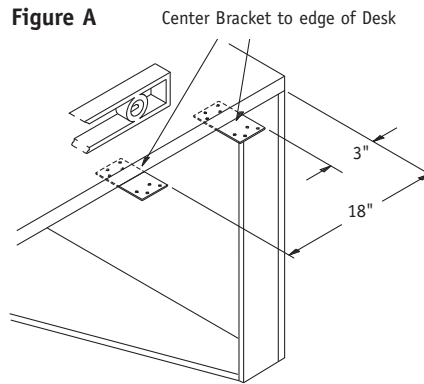

- 2 Using a rubber hammer insert a Ball Catch in each of the holes that are in the edge of the Bridge Modesty. (Figure B).

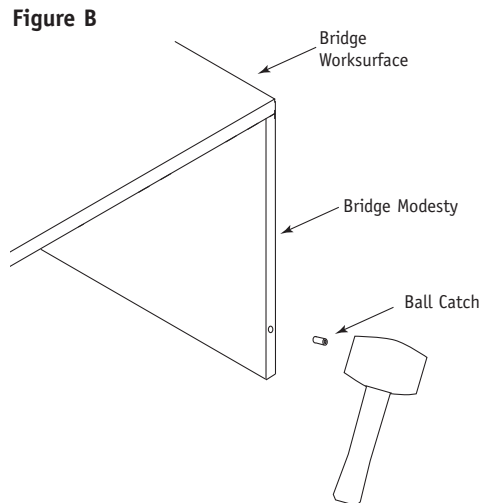

- 3 Align the bridge worksurface to the main unit. Position the worksurfaces so the outer edges of the worksurface are flush and pull tight. Fasten Bridge worksurface to the flat brackets using four (4) #10 x 1" Panhead screws per bracket (Figure C).

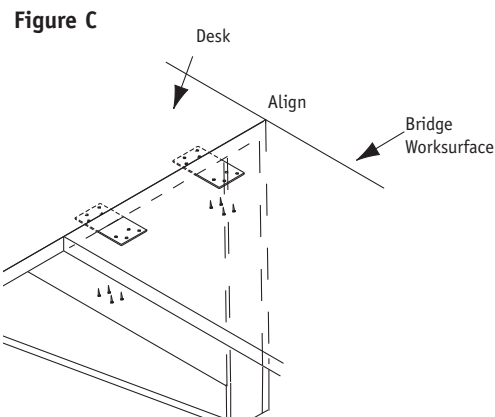

Recommended Tools

- Level
- Phillips Head Screwdriver
- Tape Measure
- Pencil
- Rubber Hammer

Package Contents Qty.

- | | |
|---------------------------------|----|
| • Bridge w/hinged modesty panel | 1 |
| • Flat Bracket | 4 |
| • #10 x 1" Panhead screws | 32 |
| • #4 x 1/2" Panhead screws | 4 |
| • Ball Catch with Catch bracket | 2 |

NATIONAL

Furniture with Personality®

Telephone 800.482.1717
Fax 812.482.8800
www.NationalOfficeFurniture.com

Part #2491934
Rev,-

Printed in U.S.A
© 2012 Kimball International, Inc.


ASSEMBLY INSTRUCTIONS

Bridge with Hinged Modesty Panel

4

With the modesty panel in the desired location, center the catch bracket over the ball catch. Using a pencil mark the location of the catch bracket on both end panels (Figure D).


Figure D

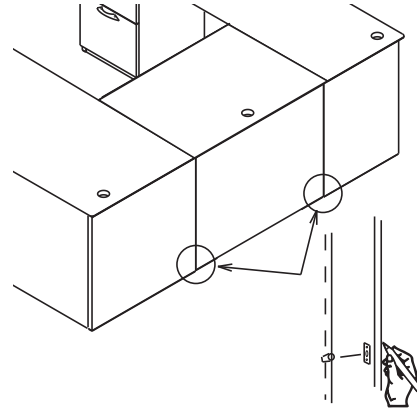

5

Swing bridge modesty panel back to access where the end panels were marked for the catch bracket. Using a screwdriver, attach Two (2) #4 Flat Head Phillips screws per catch bracket (Figure E).

Figure E

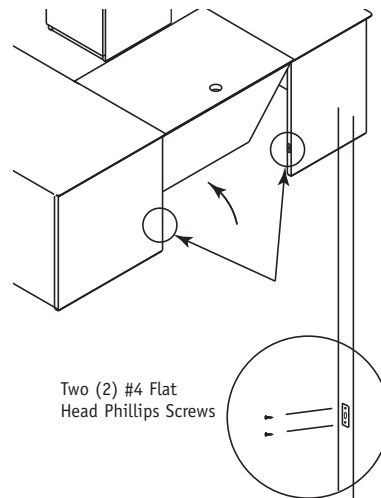

6

With the unit in the desired user position engage the ball catches into the catch brackets. (Figure F).

Figure F

