

Assembly Instruction

Note: The trim cap is normally one of the last items to be installed. This instruction only shows it attaching to a single Epicenter, on either side of a Privacy Screen, or ganged Epicenters. It is oversized for various ganging applications, and therefore it may need to be cut down to the appropriate length for installation.

1

Determine the desired location for the trim cap. Align the channel of the trim cap over the Epicenter(s) after all inserts are installed (Figure A).

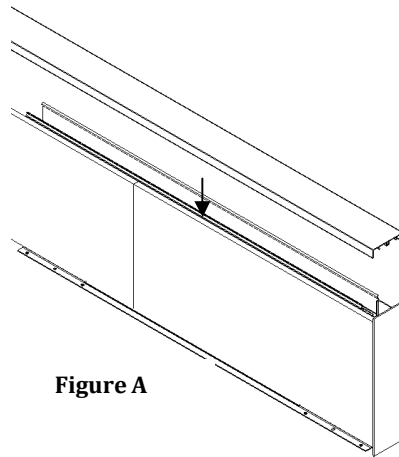


Figure A

2

If the top cap is longer than the built epicenter/epicenter run, mark the location for cutting off the excess trim cap, then cut trim cap (Figure B).

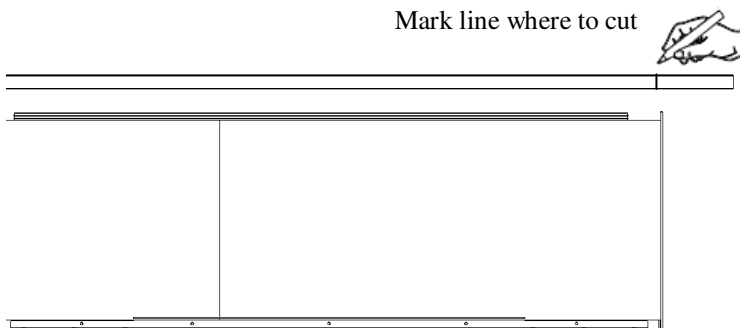


Figure B

Epicenter Trim Cap

Recommend Tools

- Marker
- Metal Cutting Tool
- Pliers

Package Contents

Qty.

- Trim Cap Per Order

NATIONAL

Furniture with Personality™

Telephone 800.482.1717
Fax 812.482.8800
www.NationalOfficeFurniture.com

Part # 2508095
Rev. -

Printed in U.S.A.
© 2013 Kimball International, Inc.

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Service 800.482.1717.

Assembly Instruction

3

To install trim cap, hook one side of cap into mating Epicenter part. Then snap other side of cap down by applying downward pressure (Figure C). If the top cap does not snap into the top of the epicenter, use pliers and/or mallet to help push in or pull out troublesome sections of the epicenter (See Figure D).

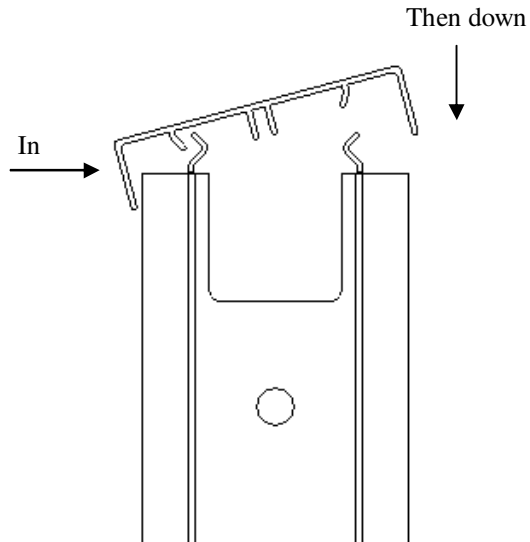


Figure C

(Shown without end trim installed for clarity)

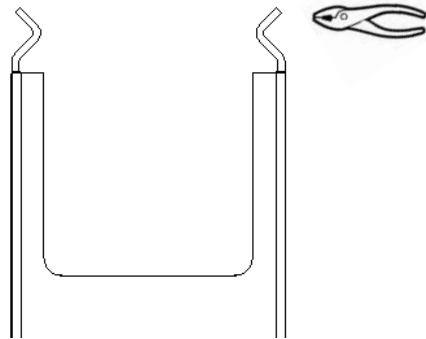


Figure D

(Pull out or push in epicenter "fingers" to better engage top cap)

Epicenter Trim Cap

NATIONAL

Furniture with Personality™

Telephone 800.482.1717
Fax 812.482.8800
www.NationalOfficeFurniture.com

Part # 2508095
Rev. -

Printed in U.S.A.
© 2013 Kimball International, Inc.

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Service 800.482.1717.