


**NOTE: INSTALL TV MOUNT PANEL INTO EXHIBIT WALL RAILS FIRST WHEN USING IN COMBINATION WITH MIO EXHIBIT BASE AND WORKSURFACE.**

**CASEGOODS**


**Exhibit TV Mount Panel Insert**

**1** Tilt top of panel forward and insert Anti-Dislodgement bracket located along top edge of panel into notch provided along underside of top wall rail (**Figure A**). Once brackets are inserted push bottom of panel against wall (**Figure B**) and set panel on bottom wall rail.

**IF VERTICAL WIRE MGR OPTION IS USED, INSTALL HARDWARE FROM VERTICAL WIRE MANAGER TO TV PANEL PRIOR TO INSTALLING PANEL ONTO WALL RAIL (REF. INSTR. SHEET 2692658)**

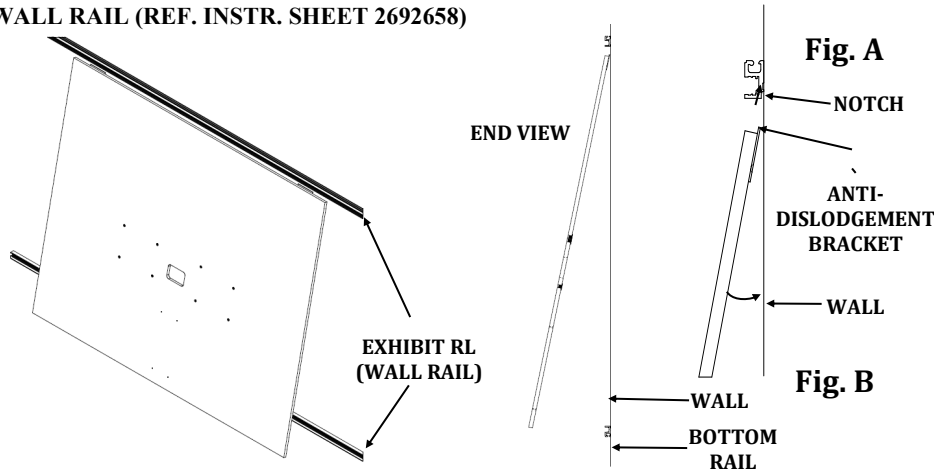

**2** ANTI DISLODGE MENT BRKT MUST BE ENGAGED INTO NOTCH BEHIND WALL RAIL BEFORE PROCEEDING. HOLD DISTANCE OF 3MM OR LESS FROM TOP EDGE OF PANEL TO BOTTOM EDGE OF WALL RAIL TO INSURE PROPER ENGAG MENT (Fig. C). Once panel has been positioned into place (Fig. D) and sitting on bottom wall rail, install bottom face plate (Fig. E) first, then install upper face plate (Fig F).

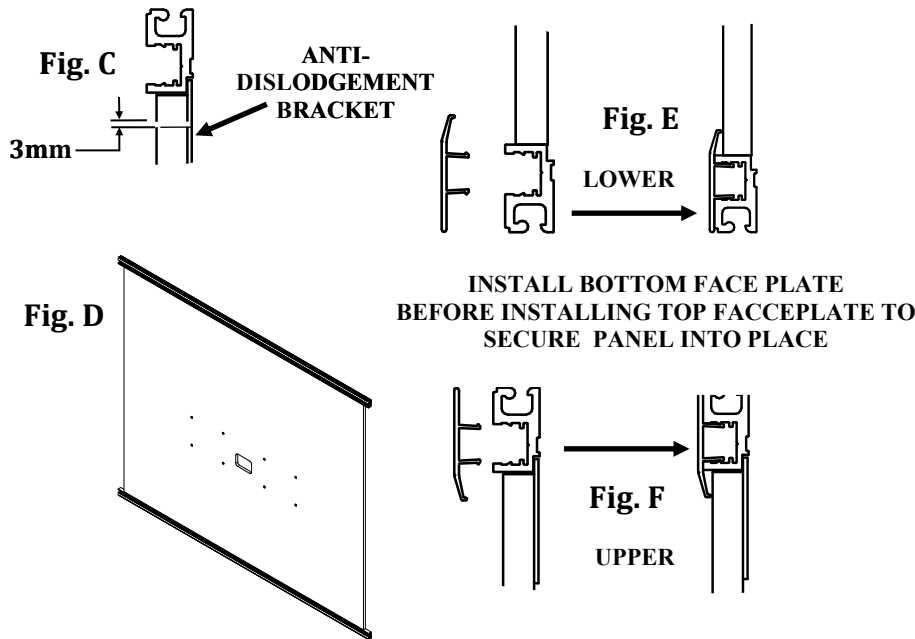

**NOTE: WEIGHT OF TV SHOULD NOT EXCEED 120 LBS (USE NATIONAL MODEL 15NTVMAS TV MOUNT ONLY)**

Package Contents	Qty.
• TV Mount Pnl	1
• L Brackets	2
• #6 x 1/2" Pan Hd Screws	4
• 5/16-18 Pan Hd Bolts	8

Hardware from each TV Mount..Qty	
M8 x 70 Hex Head Lag Bolts	4
M8 Square Spacers	4

**NATIONAL**

Furniture with Personality®

Telephone 800.482.1717  
 Fax 812.482.8800  
[www.NationalOfficeFurniture.com](http://www.NationalOfficeFurniture.com)

Part # 2692657  
 Rev, C

Printed in U.S.A  
 © 2015 Kimball International, Inc.

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Service 800.482.1717.

**3 (USE NATIONAL MODEL 15NTVMAS TV MOUNT ONLY)**

Using Installation Sheet 2516446, attach horizontal AVTEQ TV mount rails to panel using (4) 5/16"-18 x 3/4" pan head screws (PROVIDED WITH TV MOUNT PANEL) to inner four holes of panel. Spread AVTEQ mount to desired width and secure, then insert remaining (4) 5/16"-18 x 3/4 pan head screws into remaining holes in panel and tighten but do not over tighten to spin out t-nut. Then follow AVTEQ instruction sheet to mount TV.


**Note: Most TV mount hardware will be discarded.**

**4 OPTIONAL—(Hardware not included)**

To remove any deflection from or dis-alignment when panel is butted against another panel (left to right) . Drill hole or holes (diameter of hole based on hardware used) thru panel into masonry wall or stud constructed wall aligning with stud(s).

Drive screw into stud or masonry wall until panel is level or aligns to panels on either side.

**NOTE: LOCATING HARDWARE IN DEFINED AREA WILL BE HIDDEN WHEN TV IS INSTALLED AND CAN BE COMPLETED AFTER TV MOUNT HAS BEEN INSTALLED.**

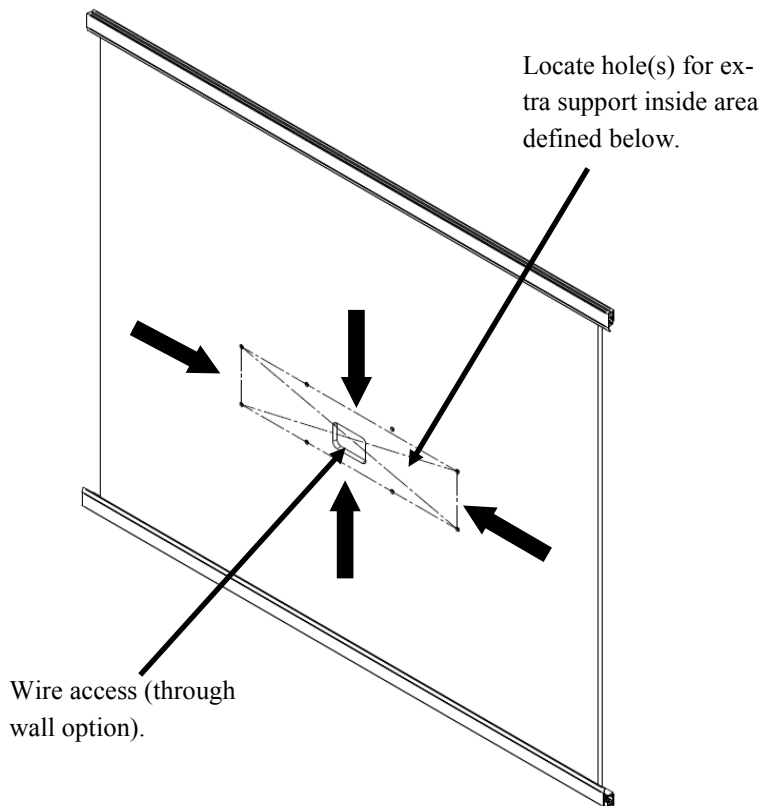

**NOTE: WEIGHT OF TV SHOULD NOT EXCEED 120 LBS (USE NATIONAL MODEL 15NTVMAS TV MOUNT ONLY)**

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Service 800.482.1717.

**Exhibit TV Mount Panel Insert**

**Recommended Tools**

- Tape Measure
- Phillips Screwdriver

**Installation of TV Mount Use Instr. Sheet 2516446**

Package Contents	Qty.
• TV Mount Pnl	1
• L Brackets	2
• #6 x 1/2" Pan Hd Screws	4
• 5/16-18 Pan Hd Bolts (To Install TV Mount)	8

Hardware from TV Mount	Qty
M8 x 70 Hex Head Lag Bolts	4
M8 Square Spacers	4

**NATIONAL**

Furniture with Personality®

Telephone 800.482.1717  
 Fax 812.482.8800  
[www.NationalOfficeFurniture.com](http://www.NationalOfficeFurniture.com)

Part # 2692657  
 Rev, A

Printed in U.S.A  
 © 2015 Kimball International, Inc.