

## Weli Table Ganging

1

To attach the table ganging bracket; locate the brackets to align the bracket so that it fits around the side rail and the slot is aligned with the mounting insert. Assemble to the chair using (1) 1/4-20 X 5/8" button head cap screw for each bracket and 5/32" driver. Ensure that the underside of the screw head is flush and tight to the mating face of the side rail.

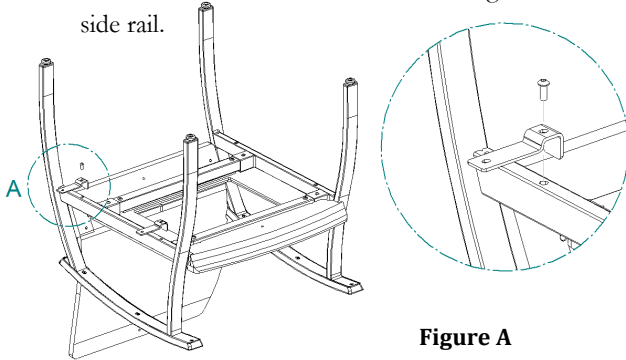


Figure A

2

To attach a ganging table, locate the assembled table so that it is supported by the ganging brackets and the slots are aligned with the mounting inserts in the worksurface. If installing a ganging center table, both ends will be supported on chair ganging brackets. Assemble using (1) 1/4-20 X 5/8" button head cap screw for each bracket and 5/32" driver. Ensure that the underside of the screw head is flush and tight to the mating face of the ganging bracket.

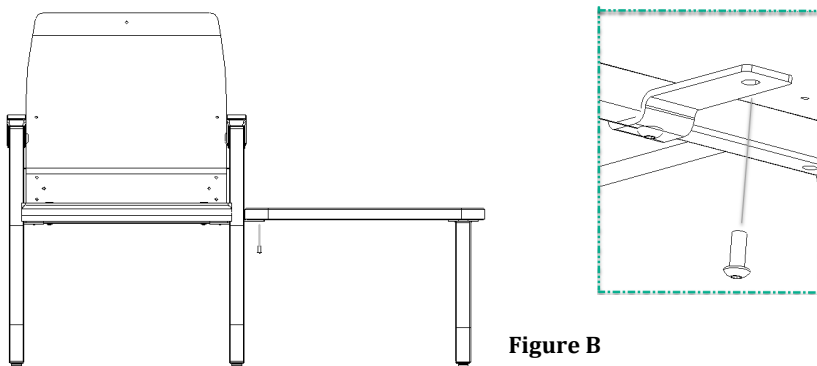


Figure B

### Product Line Weli

#### Recommend Tools

- 5/32" Hex Wrench or drive

#### Package Contents Qty.

- 1/4-20 X 5/8" BHCS Per Order
- Ganging Brackets Per Order

# NATIONAL

Furniture with Personality®

Telephone 800.482.1717  
Fax 812.482.8800  
[www.NationalOfficeFurniture.com](http://www.NationalOfficeFurniture.com)

Part # 3102099  
Rev. -

Printed in U.S.A.  
© 2013 Kimball International, Inc.

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Service 800.482.1717.