


Casbah™ Casegoods Reception Desk and Bridge

1

Install glides four (4) per pedestal and two (2) to the bridge modesty panel. Attach two (2) mounting brackets to the under side of both transaction desks where the worksurfaces will meet. Center the brackets with the edge of the worksurface. Attach each bracket with four (4) #10 x 1" panhead screws (Figure A).


Figure A

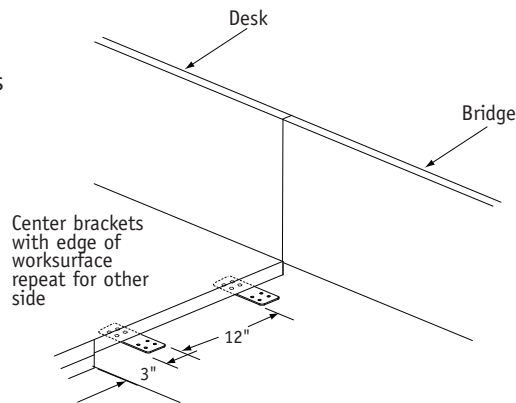

2

Attach metal L brackets to the modesty panel of the bridge with six (6) #8 x 5/8" panhead screws. Attach one (1) flat bracket to each end of bridge transaction worksurface with four (4) #10 x 1" panhead screws per bracket (Figure B).

Figure B

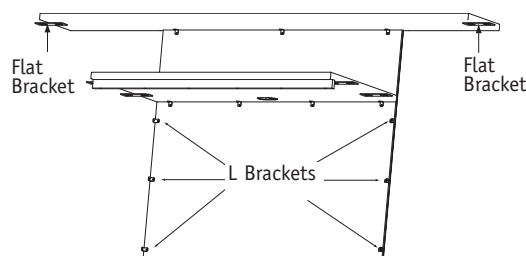

Recommended Tools

- Screw Gun
- Phillips Head Bit
- Square
- Level

Package Contents	Qty.
• Bridge	1
• Mounting Brackets	6
• #10 x 1" Panhead Screws	48
• #8 x 5/8" Panhead Screws	26
• L Brackets	13

NATIONAL

Furniture with Personality™

Telephone 800.482.1717
 Fax 812.482.8800
www.nationalonline.com

Part #2071187

Printed in U.S.A.
 © 2007 Kimball International, Inc.


Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Care Teams.

Assembly Instructions

Casbah™ Casegoods Reception Desk and Bridge


- 3** Level Reception Desk in its desired location, align bridge modesty panel with desk pedestal panel. Attach metal L brackets on bridge modesty to pedestal panel of desk with three (3) #8 x 5/8" panhead screws. Attach metal flat bracket to worksurfaces with four (4) #10 x 1" panhead screws per flat bracket. Make sure all panels and worksurfaces are flush with no gaps and firmly tighten all screws (Figure C). Repeat step for other side of bridge.

Figure C

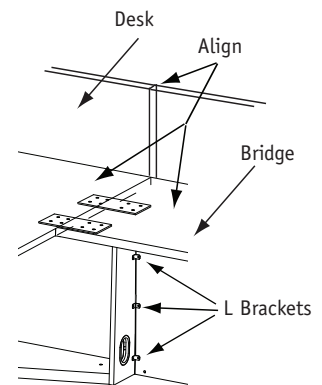


- 4** **NOTE:** If needed to align recessed façade on bridge, loosen first screw in façade and adjust alignment to desk façade so faces are flush re-tighten screw.

Figure D

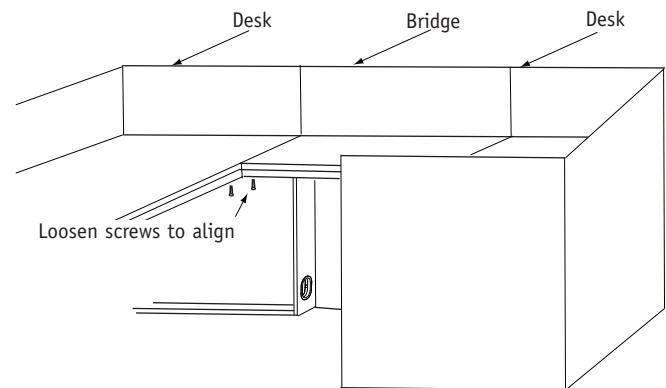

- 5** Attach bridge upper worksurface to both desk upper worksurfaces with eight (8) #10 x 1" panhead screws. Attach modesty L brackets to worksurfaces with seven (7) #8 x 5/8" panhead screws (Figure E).

Figure E

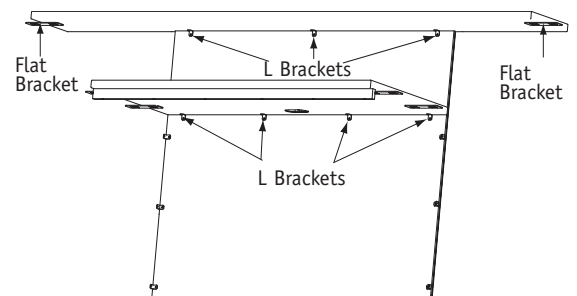

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Care Teams.